



RPP-EDW05B (JE)


P2 type fire alarm control panel



Standard Features

- ☑ Versatile zone configuration to suit various requirement
- ☑ Light weight and compact in size
- ☑ Time delay function

Dimension(mm)

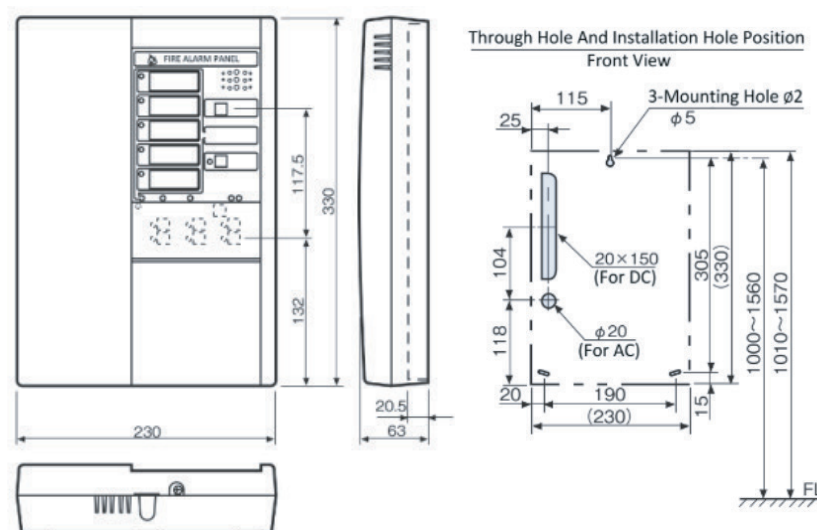

Specification - P-2 Type Fire Alarm Control Panel

Product code		RPP-EDW05B (JE)
Number of zone		5
Circuit type		RPP-E24F
Main power		AC220V 50/60Hz
Transformer rating		23VA
Battery capacity (Nickel cadmium battery)		DC12V, 0.6Ah
Power consumption	Monitoring (max.)	9VA
	Operating (max.)	22VA
Detector circuit voltage		24V (nominal)

HOCHIKI ASIA PACIFIC PTE. LTD.

82 UBI Ave 4 #06-02
Edward Boustead Centre, Singapore 408832
TEL: 65-6841-9728 | FAX: 65-6841-9781
URL : www.hochikiasiapacific.com

HEAD OFFICE

10-43 Kamiosaki 2-Chome.
Shinagawa-Ku, Tokyo 141-8660 Japan
TEL: 81-(3)-3444-4116 | FAX: 81-(3)-3444-4167
URL : www.hochiki.co.jp



RPP-EDW05B (JE)

P2 type fire alarm control panel



Specification - P-2 Type Fire Alarm Control Panel

Number of devices connected (Typical model names)	Smoke detector SLV-24N SOC-24VN		Max. 20 units/zone (11 units/zone in average of all zones)	
			70 units/ All zone	
	SPC-ET (Beam detector)		3 units/zone (Emitter separate power supply), 2 sets/zone	
	Heat detector		No limit (contact type)	
	Local sounder device	8mA bell	12 units (DC24V, 100mA)	
		13.5mA bell	6 units (DC24V, 100mA)	
	Indication lamp	9mA LED	22 units (DC24V, 210mA)	
		19mA LED	10 units (DC24V, 210mA)	
	Repeater panel		1 unit (Model: PEX-□H Type)	
Typical delay time			Typical delay time 50 s (Heat: Within 20 s, Smoke: Within 50 s)	
Delay system			Per-zone Temporary reset system	
Main alarm			Buzzer (DC24V, 25mA)	
External signal transfer	General fire alarm signal transfer		1c x 1 point (DC30V-1A)	
			1a x 1 point (DC30V-1A)	
	Manual call point signal transfer		1a x 1 point (DC30V-1A)	
	Zone-signal transfer		Open-collector output x number of zones (Compatible with PEX- □H Type)	
External wire resistance			Detector line (L-C) 50Ω or less	
End of line resistor			10kΩ	
Operating temperature range			0°C to 40°C	
Material			Self-extinguishing resin (ABS) Thickness 3mm	
Color			Original light gray (Munsell value 5GY8.5/0.4 approximate color)	
Dimension			(W)230 x (H)330 x (D)63 (mm)	

HOCHIKI ASIA PACIFIC PTE. LTD.

82 UBI Ave 4 #06-02
Edward Boustead Centre, Singapore 408832
TEL: 65-6841-9728 | FAX: 65-6841-9781
URL : www.hochikiasiapacific.com

HEAD OFFICE

10-43 Kamiosaki 2-Chome.
Shinagawa-Ku, Tokyo 141-8660 Japan
TEL: 81-(3)-3444-4116 | FAX: 81-(3)-3444-4167
URL :www.hochiki.co.jp



RPP-EDW05B (JE)

P2 type fire alarm control panel



Specification

Weight	Approx. 1.7 kg
Accessories	Battery, Instruction Manual, Installation Manual, End of line resistor 10k Ω (Equivalent to the number of zones) and Fuse clip
Spare part	Fuse: 3 pcs. Each
Country of Origin	Japan

HOCHIKI ASIA PACIFIC PTE. LTD.

82 UBI Ave 4 #06-02
Edward Boustead Centre, Singapore 408832
TEL: 65-6841-9728 | FAX: 65-6841-9781
URL : www.hochikiasiapacific.com

HEAD OFFICE

10-43 Kamiosaki 2-Chome.
Shinagawa-Ku, Tokyo 141-8660 Japan
TEL: 81-(3)-3444-4116 | FAX: 81-(3)-3444-4167
URL : www.hochiki.co.jp