



# PEX-□H

## Indication Panel

PEX-10H





PEX-50H



\*This picture shows PEX-10H and PEX-50H Japanese version

### Dimension (mm)

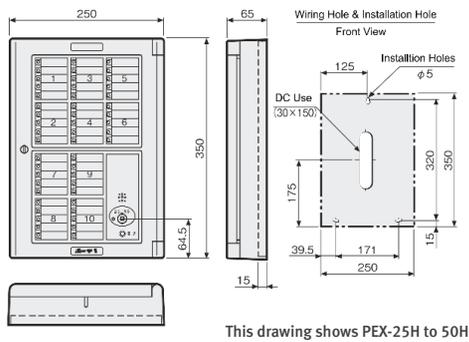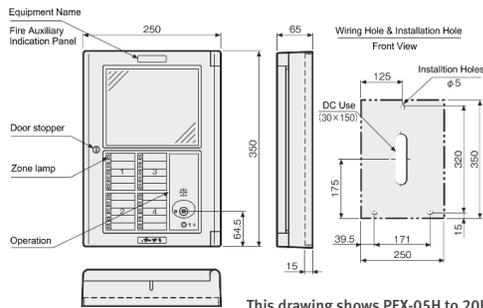

Model	Number Of Zone	Number Of Indication Lamp
PEX-05H	5	5
PEX-10H	10	10
PEX-15H	15	15
PEX-20H	20	20
PEX-25H	25	25
PEX-30H	30	30
PEX-35H	35	35
PEX-40H	40	40
PEX-50H	50	50

### Application

Indication Panel are dedicated purpose transponders that support fire alarm system status information. Typical use is when the host fire alarm control panel is located away from the area where those responding to a fire situation need status information.

The authorized user can use fireman telephone (SC-PA) to communicate with FCP and allow callers to be connected to each other. Although intended for use in assisting fire responders, these system are also helpful during system setup and maintenance.

### Specification

Type	Indication Panel
Model	PEX-□H
Operating Voltage	24Vdc
Operating Temp. Range	0°C to 40°C
Material	Self-Extinguishing Resin Thickness 3mm
Color	Light Gray
Dimension	(W)250 X (H)350 X (D)65 (mm)
Weight	Approx. 2kg
Country of Origin	Japan

HOCHIKI ASIA PACIFIC PTE. LTD.  
 71 UBI Road 1 #07-40/41  
 Oxley Bizhub, Singapore 408732  
 TEL: 65-6841-9728 | FAX: 65-6841-9781  
 URL : www.hochikiasiapacific.com

04/2020

HEAD OFFICE  
 10-43 Kamiosaki 2-Chome.  
 Shinagawa-Ku, Tokyo 141-8660 Japan  
 TEL: 81-(3)-3444-4116 | FAX: 81-(3)-3444-4167  
 URL :www.hochiki.co.jp

Specifications subject to change without notice